


CTM 7 - Clip-on mini current transformer

Download data sheet



- Extremely small and compact design
- Thanks to small current range, ideal for use e.g. in computer centres
- Installation directly on 3-phase line circuit breakers possible
- Quick and easy installation of all 3 converters on DIN top hat rail possible
- Simple connection by means of “picoMAX®” secondary terminals

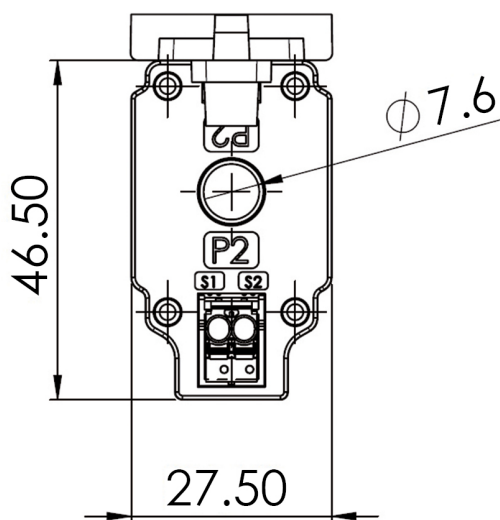

Round conductor 7.6 mm
 Construction width 27.5 mm
 Construction height 46.5 mm
 Total construction depth 19 mm

| Primary current [A] | Secondary current [A] | Load [VA] | Class | Type | Item number |
|---------------------|-----------------------|-----------|-------|-------|-------------|
| 32 | 1 | 0.2 | 1 | CTM 7 | 03.77.0001 |
| 35 | 1 | 0.2 | 1 | CTM 7 | 03.77.0002 |
| 40 | 1 | 0.3 | 1 | CTM 7 | 03.77.0003 |
| 50 | 1 | 0.4 | 1 | CTM 7 | 03.77.0004 |
| 60 | 1 | 0.4 | 1 | CTM 7 | 03.77.0005 |
| 64 | 1 | 0.5 | 1 | CTM 7 | 03.77.0006 |

Accessories

| | |
|-------------|------------------------------------|
| Designation | DIN top hat rail adapter for CTM 7 |
| Item number | 03.05.5018 |