


CTM 7 - plug-on miniature current transformer

Download
data sheet



- Extremely small and compact design
- Ideal for use in data centres, for example, thanks to its low power range
- Can be installed directly on 3-phase circuit-breakers
- All 3 transformers can be mounted quickly and easily on DIN rails
- Easy connection using “picoMAX®” secondary terminals

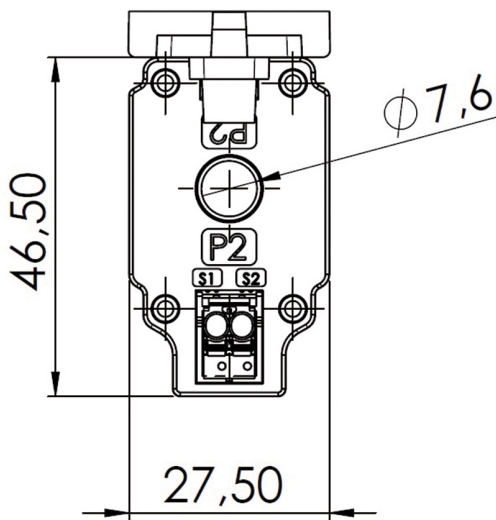

Round conductor 7.6 mm
 Width 27.5 mm
 Overall height 46.5 mm
 Total installation depth 19 mm

Primary current [A]	Secondary current [A]	Load [VA]	Class	Type	Item number
32	1	0.2	1	CTM 7	03.77.0001
35	1	0.2	1	CTM 7	03.77.0002
40	1	0.3	1	CTM 7	03.77.0003
50	1	0.4	1	CTM 7	03.77.0004
60	1	0.4	1	CTM 7	03.77.0005
64	1	0.5	1	CTM 7	03.77.0006

Accessories

Designation	Top-hat rail adapter for CTM 7
Item number	03.05.5018